



## The New Face of Lab Microscopy

### **LABOMED**°

Infinity Corrected Plan Achromatic objectives and Extra Wide Field focusable eyepieces ensure brilliant images with pristine color fidelity and contrast. Our Secure Rotation feature enables smooth and safe rotation of the viewing tubewhen locked into the stand.

2 Strain-free and safe operation is ensured through a highly ergonomic design with an ultra smooth focus drive, low-position stage controls, and a Rackless X-axis stage. Factory pre-centered fixed condenser is a standard.



From the most basic to the more complex laboratory applications, the Lx 400 stands strong as a truly modular system. With an Infinity corrected Plan Achromatic optical system, users will enjoy crisp images with excellent color fidelity and high accuracy in image rendition for a wide spectrum of specimens.


Equal attention is given to the quality of this system's mechanical components, producing robust performance throughout the life of your microscope. With the LX series' cost effective synergy of beauty and brains, a balanced microscope no longer has to be a thing reserved for the financially privileged.

All contact surfaces are treated with antimicrobial agents to ensure zero point-of-contact bacterial contamination.









3


Highly efficient Halogen or super bright LED (50,000 hours) illumination options available. Coupled with well designed optics, this system provides brilliant and even images under any light.





# Lx 400 Research Microscope

|   | Item                 | Specifications   |
|---|----------------------|--|
| - | Stand                | Single mold sturdy stand with anti rust materials. Extended base for better stability  |
| - | Viewing Bodies       | Siedentopf Binocularand Trinocular head, 30° inclined, 360° rotatable, Inter pupillary distance 48 - 75mm  |
| - | Eyepiece             | Focusable wide field eyepiece* 10x/20mm with foldable eye guard, anti fungal   |
| - | Nosepiece            | Reverse angle quadruple nosepiece (Ball bearing type) with click stops and rubber grip   |
| - | Objectives           | RP series infinity corrected DIN Plan Achromatic objectives $^*$ 4x (W.D. 30.0MM), 10x (W.D. 5.00MM), 40x (W.D. 0.65MM), 100x (W.D. 0.15MM) (spring loaded, oil), anti fungal                                      |
| - | Mechanical stage     | Rackless X axis, double plate stage size $200 \times 140$ mm, X/Y travel range $78$ mm $\times 54$ mm. Low drive right hand movement controls. Hard coated surface for scratch resistance. Double specimen holder. |
| - | Condenser            | Sub stage Abbe condenser NA 1.25 with aspheric lens*. Iris diaphragm with blue day light filter. Rack and pinion movements on stainless steel guides   |
| - | Focusing             | Coaxial coarse and fine focusing on ball drive system for smooth operation   |
| - | Illumination         | Halogen 6V-20W/30W or LED (in-built rechargeable battery) illumination with variable illumination control. Up to 2,000 hours of Halogen lamp life and 50, 000 hours of LED life                                    |
| - | Electrical           | Universal input 100V - 240V AC, 50/60Hz. Built in voltage stabilizer   |
| - | Optional accessories | Zernike Phase contrast kit with RP series Phase objectives $10x/20x/40x/100x$ , Dark field kit, Simple Polarizer/Analyzer, Dual View attachment, Fluorescence attachment; Video adapter                            |

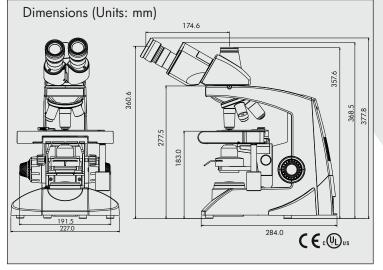

### **Configurations**

| Description       | Configuration                   | Cat. No. |
|-------------------|---------------------------------|----------|
| Standard, 20W     | Binocular                       | 9126001  |
| Standard, 30W     | Binocular                       | 9126003  |
| Standard, 20W     | Trinocular                      | 9126002  |
| Standard, 30W     | Trinocular                      | 9126004  |
| Phase obj., 30W   | Binocular                       | 9126005  |
| Phase obj., 30W   | Trinocular                      | 9126006  |
| Fluorescence      |                                 |          |
| FL attachment 50W | Binocular                       | 9126009  |
| FL attachment 50W | Trinocular                      | 9126010  |
| LED (Cordless)    |                                 |          |
| Standard, Plan    | Binocular                       | 9126011  |
| Standard, Plan    | Trinocular                      | 9126012  |
| Digital           |                                 |          |
| Standard, HL      | Binocular, Digital 3.0MP Camera | 9126014  |
| Standard, HL      | Binocular, Digital 5.0MP Camera | 9126015  |
| Standard, LED     | Binocular, Digital 3.0MP Camera |          |
| Standard, LED     | Binocular, Digital 5.0MP Camera | 9126017  |
|                   |                                 |          |

All optical components are made of environment friendly LEAD free optical

#### **Labomed Europe**

Essebaan 50 NL-2908 LK Capelle a/d IJssel The Netherlands

+31(0)104584222 Tel: +31(0)104508251 Fax: info@labomedeurope.com Email:

www.labomedeurope.com

\*Labomed Europe, a division of Breukhoven b.v.

With a policy of continuous development, Labo America, Inc. reserves the right to change design and specifications without prior notice.

Distributor

